

## 2H SPN SPRAY NOZZLES

Optimum Water Distribution



The axial nozzles are designed as complete cone spiral nozzle consisting of a casing and an insert. Correctly assembled, the nozzles distribute the water with a spray angle of 120°, where the water flow rate depends on the operational pressure.

We recommend checking the operation conditions, as nozzle distance and height have to be chosen according to the respective plant requirements.


### Features of our 2H SPN Spray Nozzles

- Low clogging and scaling tendency due to smooth surface design
- Constant self-cleaning by high turbulence in the nozzle body
- Easy installation onto the piping system due to BSP thread and hexagon body design
- High resistance to a large range of chemicals because the nozzles are made of glass reinforced polyamide (nylon)

We offer water distribution nozzles for cooling towers, humidifiers, scrubbers, air coolers and aerators. These nozzles are made of glass fiber reinforced polyamide (nylon) and are resistant to a large range of chemicals. Their smooth surface impedes clogging and scaling. The spray angle of 120° provides an optimum water distribution above the cooling tower packing.

Technical Data											
Type	Application	Material	Thread	Thread height	Total height	Spanner width	Spray angle	Operation pressure	Permanent service temp.	Max. Application temp.	
			inch	mm	mm	mm	°	bar	°C	°C	
SPN 015	Liquid distribution in vertical operation in cooling towers humidifiers scrubbers air coolers aerators	glass reinforced polyamide (nylon)	1½	17.5	48	50	120	0.2 – 2.0	60	80	
SPN 020		glass reinforced polyamide (nylon)	2	19	60	65	120	0.2 – 2.0	60	80	
SPN 025		glass reinforced polyamide (nylon)	2½	28	75	80	120	0.2 – 2.0	60	80	

## Flow Diagram

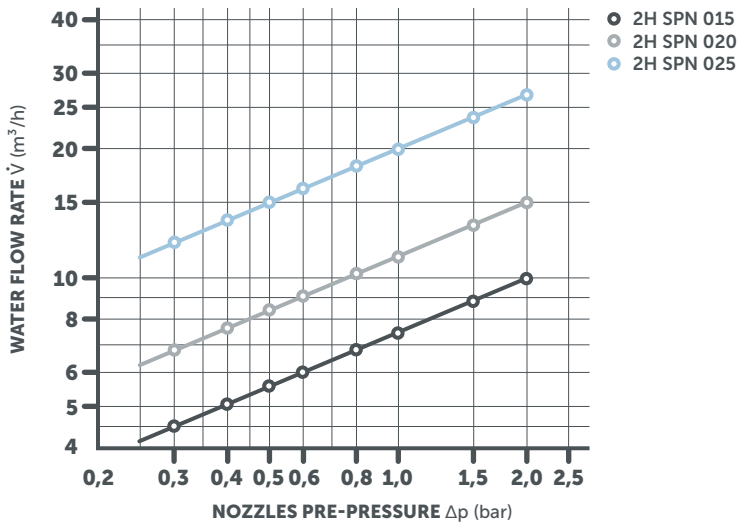

This information has been put together with greatest care. However, any performance data given in this leaflet is subject to compliance with certain surrounding conditions and hence may vary from case to case. Further, we reserve the right to make changes at any time without notice. We strongly recommend (i) reconfirmation with us whether this information is still fully valid, before using it for final designs and (ii) to verify performance data taking into account the actual surrounding conditions. We do not take any responsibility for any consequences due to non-compliance with these recommendations.



Management System  
ISO 9001:2008  
www.tuv.com  
ID 9105070210

ENEXIO Water Technologies, Germany,  
is ISO 9001:2008 certified.

**ENEXIO Water Technologies s.r.o.**  
Teplicka 22, 40701 Jilove, Czech Republic  
Tel: +420 412 545 465, FAX: +420 412 545 466  
info@enexio-2h.cz, www.enexio-2h.cz, www.enexio.com

